


PRODUCT CATALOGUE 2025

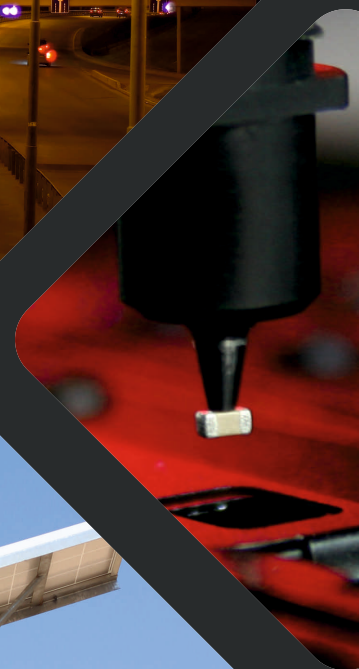

**GALAXY
ELECTRONICS**

  +91 88309 94756, +91 98504 16845

ABOUT US

Established in 2017 in Pune, Maharashtra, Galaxy Electronics is proud to be an ISO 9001:2015 certified company. We specialize in manufacturing premium quality and affordable lighting solutions such as Flood Lights, Street Lights, Industrial Lights, Solar Streetlights, Stadium Lights, Tube Lights, etc. Our products are renowned for their durability and superior quality. We have built a strong reputation for our efficient and timely delivery, ensuring we meet the needs of our clients promptly. Our commitment to excellence has earned us a loyal client base, making us a trusted name in the lighting industry.



Premium Quality
& Durability



ISO 9001:2015
Certified



Efficient &
Timely Delivery

VISION

To be the leading innovator in the global lighting industry, illuminating spaces with sustainable, premium quality, and affordable lighting solutions that significantly enhance the quality of life for diverse communities worldwide.

MISSION

To manufacture and deliver superior lighting products that exemplify durability and excellence, while maintaining our commitment to customer satisfaction, timely delivery, and continuous improvement through cutting-edge technology and adherence to international standards.

OUR SERVICES & PRODUCTS



PCB Assembly Service




Development & manufacturing of Electronic Products



LED Lighting Products

PCB Assembly Service

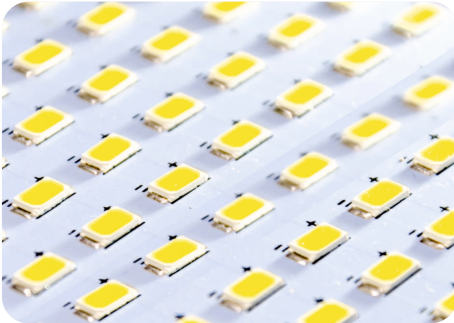


At Galaxy Electronics, our PCB (Printed Circuit Board) Assembly Service is engineered to provide precise, high-quality, and reliable solutions for a wide range of electronic applications.

Includes support for:


- PCB Fabrication
- Component Procurement
- Functional Testing of PCBs
- Cost Optimization/ Reduction

Our Process:

-  1. Planning
-  2. Procurement
-  3. Assembly
-  4. Quality Check
-  5. Delivery

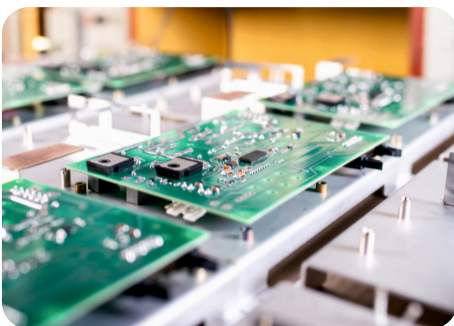

Development & Manufacturing of Electronic Products

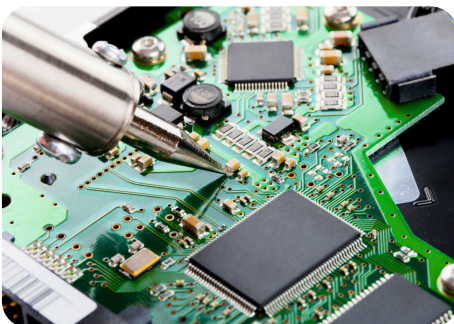


Galaxy Electronics offers comprehensive Electronics Product Development and Manufacturing Services, ensuring innovative and high-quality solutions for all your electronic needs.

Includes:

- Research & Development
- Circuit Design
- PCB Design
- BOM Finalization
- Product Cost Optimization/ Reduction
- Production & Manufacturing

Features:

-  1. End-to-End Solution
-  2. Skilled Team
-  3. Timely Delivery

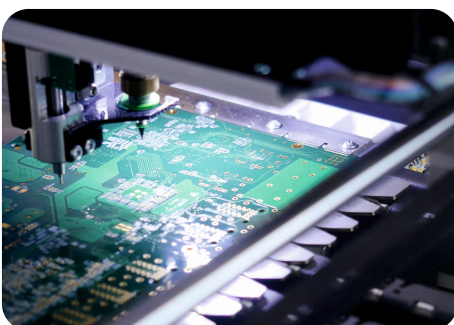

LED BULB



MODEL ⚡ WATTAGE

GE-LB-101	0.5 W
GE-LB-102	5 W
GE-LB-103	7 W
GE-LB-104	9 W
GE-LB-105	12 W
GE-LB-106	15 W
GE-LB-107	18 W
GE-LB-108	20 W
GE-LB-109	30 W
GE-LB-110	50 W

OTHER SPECIFICATIONS:

- HOLDER: B22 ,E27 (ALLUMINUM)
- DIFFUSER: MILKY WHITE
- 2.5 KV SURGE PROTECTION
- RATED VOLTAGE: 130V - 260V
- OUTPUT LUMENS: 130 LM PER WATT
- INPUT FREQUENCY - 50Hz
- LIFE > 50000 HRS
- POWER FACTOR > 0.9

 Color: WW, NW, CW; CCT: 6500K, 4000K, 3000K

LED TUBE LIGHT



MODEL ⚡ WATTAGE LENGTH

GE-TL-101	5 W	1 FEET
GE-TL-102	10 W	2 FEET
GE-TL-103	18 W	4 FEET
GE-TL-104	22 W	4 FEET

OTHER SPECIFICATIONS:

- INPUT POWER (10WATT/20WATT)
- INPUT VOLTAGE: 220-240V, AC- 50Hz
- POWER FACTOR > 0.9
- VIEWING ANGLE- 120° /110°.
- LUMINOUS FLUX - 800/1600
- FINISH- WHITE
- HOUSING: PVC
- DIFFUSER: MILKY WHITE
- MOUNTING: WALL SURFACE

 Color: WW, NW, CW; CCT: 6500K, 4000K, 3000K

COB/ SPOT LIGHT

DELTA DEEP



MODEL ⚡ WATTAGE

GE-CLD-101	8 W (55 mm)
GE-CLD-102	15 W (80 mm)
GE-CLD-103	22 W (85 mm)

OTHER SPECIFICATIONS:

- BODY: ALLUMINIUM DIE CAST
- FINISH: POWDER COATED
- LED: OSRAM & BRIDGELUX
- SHAPE: ROUND
- METAL SINK FOR DURABLE PERFORMANCE
- INPUT VOLTAGE: 100-290V, 50/60Hz
- OPERATING TEMPERATURE: -10°C TO +45°C
- POWER FACTOR > 0.9
- OPERATING VOLTAGE: 110-250V

 Color: WW, NW, CW

MOVABLE



MODEL ⚡ WATTAGE

GE-CLM-101	4 W (55 mm)
GE-CLM-102	8 W (75 mm)
GE-CLM-103	15 W (60 mm)
GE-CLM-102	24 W (70 mm)
GE-CLM-103	36 W (80 mm)

OTHER SPECIFICATIONS:

- BODY: ALLUMINIUM DIE CAST
- FINISH: POWDER COATED
- LED: OSRAM & BRIDGELUX
- SHAPE: ROUND
- METAL SINK FOR DURABLE PERFORMANCE
- INPUT VOLTAGE: 100-290V, 50/60Hz
- OPERATING TEMPERATURE: -10°C TO +45°C
- POWER FACTOR > 0.9
- OPERATING VOLTAGE: 110-250V

 Color: WW, NW, CW

LED STRIP LIGHT

SINGLE COLOR & MULTICOLOR



SINGLE COLOR

MODEL LEDs/METER

GE-LSS-101	60
GE-LSS-102	120
GE-LSS-103	240

MULTI COLOR

MODEL LEDs/METER

GE-LSM-101	60
GE-LSM-102	120

OTHER SPECIFICATIONS:

- INPUT VOLTAGE- AC 220-240V, 50/60Hz.
- VOLTAGE OPERATING RANGE- 100-300V.
- HIGH SURGE PROTECTION-2.5KV.
- LED LIFE - 30000 BH.
- LUMINOUS FLUX - 800/1600
- BIS APPROVED PRODUCT
- APPLICATIONS: SHOWROOM, RESTAURANTS, HOTELS, RESIDENTIAL USE

 Color: WW, NW, CW; CCT: 6500K, 4000K, 3000K, RGB

PANEL LIGHT

CONCEALED (SINGLE COLOR & 3 IN 1)



MODEL ⚡ WATTAGE SHAPE

GE-CP-101	8 W	SQUARE
GE-CP-102	8 W	CIRCLE
GE-CP-103	12 W	SQUARE
GE-CP-104	12 W	CIRCLE
GE-CP-105	15 W	SQUARE
GE-CP-106	15 W	CIRCLE
GE-CP-107	18 W	SQUARE
GE-CP-108	18 W	CIRCLE
GE-CP-109	22 W	SQUARE
GE-CP-110	22 W	CIRCLE
GE-CP-111	36-48 W	2'x2'

OTHER SPECIFICATIONS:

- HIGH EFFICIENCY 80LM/W-120LM/W
- SUPER SLIM DESIGN, SAVE 70% ENERGY
- LIFE SPAN: 50000 HRS
- INPUT VOLTAGE: 85V - 265V
- INSTANT START, NO NOISE, NO FLICKERING
- EFFICIENT CONSTANT CURRENT DRIVER
- BODY: PVC

 Size: 4, 5, 6, 8 Inch  Color: WW, NW, CW

SURFACE (SINGLE COLOR & 3 IN 1)



MODEL ⚡ WATTAGE SHAPE

GE-SP-101	8 W	SQUARE
GE-SP-102	8 W	CIRCLE
GE-SP-103	12 W	SQUARE
GE-SP-104	12 W	CIRCLE
GE-SP-105	15 W	SQUARE
GE-SP-106	15 W	CIRCLE
GE-SP-107	18 W	SQUARE
GE-SP-108	18 W	CIRCLE
GE-SP-109	22 W	SQUARE
GE-SP-110	22 W	CIRCLE

OTHER SPECIFICATIONS:

- HIGH EFFICIENCY 80LM/W-120LM/W
- SUPER SLIM DESIGN, SAVE 70% ENERGY
- LIFE SPAN: 50000 HRS
- INPUT VOLTAGE: 85V - 265V
- INSTANT START, NO NOISE, NO FLICKERING
- EFFICIENT CONSTANT CURRENT DRIVER
- BODY: PVC

 Size: 4, 5, 6, 8 Inch  Color: WW, NW, CW

DEEP DOWN LIGHT



MODEL ⚡ WATTAGE

GE-DD-101	12 W
GE-DD-102	18 W
GE-DD-103	24 W

OTHER SPECIFICATIONS:

- BODY: ALLUMINIUM DIE CAST; SHAPE: ROUND
- FINISH: POWDER COATED
- LED: OSRAM & BRIDGELUX
- SHAPE: ROUND
- METAL SINK FOR DURABLE PERFORMANCE
- INPUT VOLTAGE: 100-290V, 50/60Hz
- OPERATING TEMPERATURE: -10°C TO +45°C
- POWER FACTOR > 0.9
- OPERATING VOLTAGE: 110-250V
- BEAM ANGLE: 120°

 Color: WW, NW, CW; CCT: 6500K, 4000K, 3000K

STREET LIGHT

GLASS MODEL



MODEL ⚡ WATTAGE

GE-SLG-101	12 W
GE-SLG-102	15 W
GE-SLG-103	20 W
GE-SLG-104	24 W
GE-SLG-105	36 W
GE-SLG-106	40 W
GE-SLG-107	50 W
GE-SLG-108	60 W
GE-SLG-109	80 W
GE-SLG-110	100 W

MODEL ⚡ WATTAGE

GE-SLG-111	120 W
GE-SLG-112	150 W
GE-SLG-113	200 W

AVAILABLE TYPES:

- WITH LENS
- WITHOUT LENS

OTHER SPECIFICATIONS:

- INPUT VOLTAGE: 100-250 VAC
- POWER EFFICIENCY > 90%
- POWER FACTOR > 0.95
- SURGE PROT.: UPTO 10KVA
- BODY: AL. HEAVY DIE CAST
- TOUGHENED GLASS
- LIFE SPAN > 50000 HRS
- WATER PROOF, IP65
- WORKING TEMP: -30°C - -65°C



Color: WW, NW, CW; CCT: 6500K, 4000K, 3000K

LENS MODEL



MODEL ⚡ WATTAGE

GE-SLL-101	20 W
GE-SLL-102	24 W
GE-SLL-103	36 W
GE-SLL-104	50 W
GE-SLL-105	72 W
GE-SLL-106	100 W
GE-SLL-107	150 W
GE-SLL-108	200 W

OTHER SPECIFICATIONS:

- INPUT VOLTAGE: 100-250 VAC
- POWER EFFICIENCY > 90%
- POWER FACTOR > 0.95
- SURGE PROT.: UPTO 10KVA
- BODY: AL. HEAVY DIE CAST
- POLYCARBONATE
- LIFE SPAN > 50000 HRS
- WATER PROOF, IP65
- WORKING TEMP: -30°C - -65°C



Color: WW, NW, CW; CCT: 6500K, 4000K, 3000K

FLOOD LIGHT

BACK CHOKE



MODEL ⚡ WATTAGE

GE-FLB-101	30 W
GE-FLB-102	50 W
GE-FLB-103	100 W
GE-FLB-104	150 W
GE-FLB-105	200 W
GE-FLB-106	300 W
GE-FLB-107	400 W
GE-FLB-108	500 W
GE-FLB-109	600 W
GE-FLB-110	800 W

AVAILABLE TYPES:

- Back Choke - Glass Model
- Back Choke - Glass with Lens Model

OTHER SPECIFICATIONS:

- INPUT VOLTAGE- AC90-295V
- POWER EFFICIENCY > 90%
- POWER FACTOR > 0.95
- IP GRADE: IP65
- LIFE SPAN: 50000 HRS
- WATERPROOF
- WORKING VOLTAGE: DC30-36V
- 10 KV SURGE PROTECTION



Color: WW, NW, CW; CCT: 6500K, 4000K, 3000K

DOWN CHOKE



MODEL ⚡ WATTAGE

GE-FLD-101	10 W
GE-FLD-102	20 W
GE-FLD-103	30 W
GE-FLD-104	50 W
GE-FLD-105	100 W
GE-FLD-106	150 W
GE-FLD-107	200 W
GE-FLD-108	250 W
GE-FLD-109	300 W
GE-FLD-110	400 W

AVAILABLE TYPES:

- Single Color ➤ 2 in 1
- RGB

OTHER SPECIFICATIONS:

- INPUT VOLTAGE- AC90-295V
- POWER EFFICIENCY > 90%
- POWER FACTOR > 0.95
- IP GRADE: IP65
- LIFE SPAN: 50000 HRS
- WATERPROOF
- WORKING VOLTAGE: DC30-36V



Color: WW, NW, CW; CCT: 6500K, 4000K, 3000K

DOWN CHOKE GLASS LENS WITH 2 IN 1 COLOR



MODEL ⚡ WATTAGE

GE-FLDGL-101	180 W
--------------	-------

OTHER SPECIFICATIONS:

- INPUT VOLTAGE- AC90-295V
- POWER EFFICIENCY > 90%
- 5050 HIGH LUMENS LED USED
- LENS ANGLE- 25°
- WATERPROOF
- BIG HANDLE
- WORKING VOLTAGE: DC30-36V



COMBINATION COLOR: CW, WW, AMBER GREEN

LENS DOWN CHOKE



MODEL ⚡ WATTAGE

GE-FLL-101	30 W
GE-FLL-102	50 W
GE-FLL-103	100 W
GE-FLL-104	150 W
GE-FLL-105	200 W
GE-FLL-106	250 W
GE-FLL-107	300 W

OTHER SPECIFICATIONS:

- INPUT VOLTAGE- AC90-295V
- POWER EFFICIENCY > 90%
- POWER FACTOR > 0.95
- IP GRADE: IP65
- LIFE SPAN: 50000 HRS
- WATERPROOF
- WORKING VOLTAGE: DC30-36V
- COLOR OF LAMP SHELL: WHITE



Color: WW, NW, CW; CCT: 6500K, 4000K, 3000K

LINKABLE WITH 2835 LED



MODEL ⚡ WATTAGE

GE-FL-101	60W
GE-FL-102	120W
GE-FL-103	180W
GE-FL-104	240W
GE-FL-105	300W

OTHER SPECIFICATIONS:

- INPUT VOLTAGE- AC90-295V
- POWER EFFICIENCY > 90%
- POWER FACTOR > 0.95
- IP GRADE: IP65
- LIFE SPAN: 50000 HRS
- WATERPROOF
- WORKING VOLTAGE: DC30-36V



Color: WW, NW, CW; CCT: 6500K, 4000K, 3000K

LINKABLE STADIUM WITH 5050 LED & LENS



MODEL ⚡ WATTAGE

GE-FLS-101	120W
GE-FLS-102	240W
GE-FLS-103	360W
GE-FLS-104	480W
GE-FLS-105	600W
GE-FLS-106	720W
GE-FLS-107	840W
GE-FLS-108	960W

OTHER SPECIFICATIONS:

- INPUT VOLTAGE- AC90-295V
- POWER EFFICIENCY > 90%
- POWER FACTOR > 0.95
- IP GRADE: IP65
- LIFE SPAN: 50000 HRS
- WATERPROOF
- WORKING VOLTAGE: DC30-36V



Color: WW, NW, CW; CCT: 6500K, 4000K, 3000K

SOLAR LIGHTS

STREET LIGHT



MODEL ⚡ WATTAGE

GE-SSL-101	9 W
GE-SSL-102	12 W
GE-SSL-103	15 W
GE-SSL-104	18 W
GE-SSL-105	20 W
GE-SSL-106	24 W
GE-SSL-107	30 W
GE-SSL-108	32 W
GE-SSL-109	36 W
GE-SSL-110	40 W

MODEL ⚡ WATTAGE

GE-SSL-111	50 W
GE-SSL-112	60 W

AVAILABLE TYPES:

- All in 1 (Integrated)
- Semi Integrated

OTHER SPECIFICATIONS:

- BIS APPROVED SOLAR PANEL
- BATTERY : LIFEPO4
- LUMENS PER WATT: 160 LM/W
- BODY: AL. HEAVY DIE CAST
- DIMMING AFTER 4 HOURS
- CHARGE TIME : 4 TO 6 HRS
- DISCHARGE TIME: 12-15 HRS
- PROTECTION: IP67

 Color: WW, NW, CW; CCT: 6500K, 4000K, 3000K

FLOOD LIGHT



MODEL ⚡ WATTAGE

GE-SFL-101	9 W
GE-SFL-102	12 W
GE-SFL-103	15 W
GE-SFL-104	18 W
GE-SFL-105	20 W
GE-SFL-106	24 W
GE-SFL-107	30 W
GE-SFL-108	32 W
GE-SFL-109	36 W
GE-SFL-110	40 W

MODEL ⚡ WATTAGE

GE-SFL-111	50 W
GE-SFL-112	60 W

AVAILABLE TYPES:

- All in 1 (Integrated)
- Semi Integrated

OTHER SPECIFICATIONS:

- INPUT VOLTAGE: 100-250 VAC
- BIS APPROVED SOLAR PANEL
- BATTERY : LIFEPO4 12.8v 42Ah
- LED LIGHT LUMENS :5600 LM
- BODY: AL. HEAVY DIE CAST
- DIMMING AFTER 4 HOURS
- CHARGE TIME : 4 TO 6 HRS
- DISCHARGE TIME: 12-15 HRS
- PROTECTION: IP67

 Color: WW, NW, CW; CCT: 6500K, 4000K, 3000K

HIGH BAY

GLASS MODEL



MODEL ⚡ WATTAGE

GE-HBG-101	50 W
GE-HBG-102	100 W
GE-HBG-103	150 W
GE-HBG-104	200 W

AVAILABLE TYPES:

- Glass Model - Single Color
- Glass Model - 2 in 1

OTHER SPECIFICATIONS:

- INPUT VOLTAGE: 100 VAC - 277 VAC, 50/60Hz
- OPERATING VOLTAGE RANGE: 90-305V
- LUMINOUS FLUX(IM): 110-130LM
- WATERPROOF: IP65
- POWER FACTOR: 0.95
- WORKING LIFETIME: 50000 HRS
- HIGH PERFORMANCE ELECTRONICS DRIVER ENSURES ZERO MAINTENANCE
- ALUMINIUM DIE CASTING HOUSING: FIN SHAPE + TEMPERED GLASS + REFLECTOR

 Color: WW, NW, CW; CCT: 6500K, 4000K, 3000K

POLYCARBONATE IN BUILT LENS



MODEL ⚡ WATTAGE

GE-HBP-101	50 W
GE-HBP-102	100 W
GE-HBP-103	150 W
GE-HBP-104	200 W
GE-HBP-105	250 W
GE-HBP-106	300 W

OTHER SPECIFICATIONS:

- INPUT VOLTAGE: 100 VAC - 277 VAC, 50/60Hz
- OPERATING VOLTAGE RANGE: 90-305V
- LUMINOUS FLUX(IM): 110-130LM
- WATERPROOF: IP65
- POWER FACTOR: 0.95
- WORKING LIFETIME: 50000 HRS
- HIGH PERFORMANCE ELECTRONICS DRIVER ENSURES ZERO MAINTENANCE
- ALUMINIUM DIE CASTING HOUSING: FIN SHAPE + POLY CARBONATE LENS + SILICON GASKET

 Color: WW, NW, CW; CCT: 6500K, 4000K, 3000K

GLASS WITH LENS & 5050 LED



MODEL ⚡ WATTAGE

GE-HBL-101	50 W
GE-HBL-102	100 W
GE-HBL-103	150 W
GE-HBL-104	200 W

2 in 1 MODEL ⚡ WATTAGE

GE-HBL-105	100 W
GE-HBL-106	200 W

OTHER SPECIFICATIONS:

- INPUT VOLTAGE: 100 VAC - 277 VAC, 50/60Hz
- OPERATING VOLTAGE RANGE: 90-305V
- LUMINOUS FLUX(IM): 110-130LM
- WATERPROOF: IP65
- POWER FACTOR: 0.95
- WORKING LIFETIME: 50000 HRS
- HIGH PERFORMANCE ELECTRONICS DRIVER ENSURES ZERO MAINTENANCE
- ALUMINIUM DIE CASTING HOUSING: FIN SHAPE + TEMPERED GLASS + REFLECTOR



Color: WW, NW, CW; CCT: 6500K, 4000K, 3000K

WELL GLASS



MODEL ⚡ WATTAGE

GE-HBW-101	50 W
GE-HBW-102	70 W
GE-HBW-103	100 W
GE-HBW-104	150 W
GE-HBW-105	200 W

OTHER SPECIFICATIONS:

- INPUT VOLTAGE- AC90-295V
- POWER EFFICIENCY > 90%
- POWER FACTOR > 0.95
- IP GRADE: IP65
- LIFE SPAN: 50000 HRS
- WATERPROOF
- WORKING VOLTAGE: DC30-36V
- ALUMINIUM DIE CASTING HOUSING: TEMPERED GLASS + REFLECTOR



Color: WW, NW, CW; CCT: 6500K, 4000K, 3000K

OTHERS

FOOT LAMP



MODEL TYPE

GE-F-101	2 MODULE
GE-F-102	3 MODULE
GE-F-103	4 MODULE

OTHER SPECIFICATIONS:

- MATERIAL: ALUMINIUM DIE CAST
- WATERPROOF: IP66
- PRODUCT TYPE: OUTDOOR
- WATTAGE: 5WATT
- COLOUR TEMP.: 3000K,4000K,6500K



Color: WW, NW, CW; CCT: 6500K, 4000K, 3000K

BOLLARD LIGHT



MODEL SIZE

GE-BL-101	300 MM
GE-BL-102	600 MM
GE-BL-103	900 MM

OTHER SPECIFICATIONS:

- POWER: 5 TO 20 WATT
- MATERIAL: POWDER COATED MS
- CCT: 300K,4000K,6000K
- HEIGHT: 300MM, 600MM, 900MM



Color: WW, NW, CW; CCT: 6500K, 4000K, 3000K

SURFACE CYLINDER LIGHT



MODEL ⚡ WATTAGE

GE-SCL-101	8 W
GE-SCL-102	15 W
GE-SCL-103	20-22W

OTHER SPECIFICATIONS:

- WARRANTY: 2 YEARS
- MATERIAL: ALUMINIUM
- SHAPE: ROUND
- BEAMING ANGLE: 38°
- BODY COLOR: WHITE/ BLACK
- REFLECTOR COLOR: ROSE GOLD/ BLACK



Color: WW, NW, CW; CCT: 6500K, 4000K, 3000K

SOLAR BLINKER



MODEL TYPE

GE-B-101	SOLAR
GE-B-102	AC

OTHER SPECIFICATIONS:

- POWER CONSUMPTION: 3W TP 4W
- BATTERY BACKUP: 24 HRS
- BATTERY: LITHIUM
- BODY MATERIAL: POLYCARBONATE
- INBUILT MICROPROCESSOR BATTERY CHARGER WITH UNDER & OVER VOLTAGE PROTECTION
- FREQUENCY: 35 TO 45 FLASH PER MINUTE
- IP65

MOTION SENSOR LIGHTS



MODEL BODY FUNCTION

GE-MS-101	TUBE LIGHT	DIMMABLE
GE-MS-102	TUBE LIGHT	ON-OFF
GE-MS-103	PANEL LIGHT	DIMMABLE
GE-MS-104	PANEL LIGHT	ON-OFF
GE-MS-105	STREET LIGHT	DIMMABLE
GE-MS-106	STREET LIGHT	ON-OFF


OTHER SPECIFICATIONS:

- Light will automatically gets full ON when it detects any person in its radar.
- Light will dim after 30 seconds when there is no motion of any object.
- Motion detection area: 20 to 25 feet in radius.
- Power saving up to 80% than regular lights.
- High Reliability, long life than regular lights.
- Warranty: 2 Years.



Color: WW, NW, CW; CCT: 6500K, 4000K, 3000K

SMPS / DRIVER

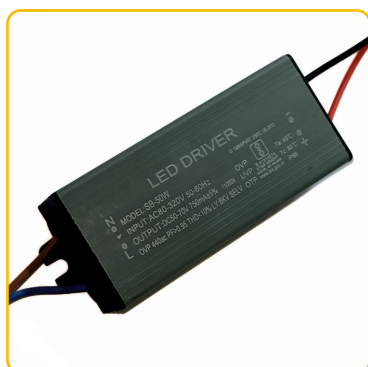

SMPS

MODEL ⚡ RATING

GE-SD-101	1 Amp to 25 Amp
-----------	-----------------

DRIVER

MODEL ⚡ RATING

GE-SD-102	50W (750mA & 1500mA)
GE-SD-103	8-24W (300mA)

DRIVER SPECIFICATIONS:

- INPUT VOLTAGE: 90VAC-320VAC, 50-60Hz
- OUTPUT VOLTAGE: 50-70V
- OUTPUT CURRENT: 750MA
- OVER VOLTAGE PROTECTION: 440VAC
- POWER FACTOR >0.95
- THD< 10%
- INBUILT SURGE PROTECTION -6KV

WALL LIGHT



MODEL	TYPE
GE-WL-101	2 WAY
GE-WL-102	4 WAY
GE-WL-103	K LIGHT
GE-WL-104	HALF K

OTHER SPECIFICATIONS:

- BODY COLOUR: BLACK/ GREY
- WATTAGE- 3, 6, 9 W
- INDIRECT LIGHTING
- RUST & WATER PROOF
- SILICON POTTED DRIVER
- HEAVY ALLUMINIUM BODY
- VOLTAGE (VAC): 190-260V, 50Hz
- EFFICIENCY - 80-85%
- POWER FACTOR: 0.90-0.95



Color: WW, NW, CW; CCT: 6500K, 4000K, 3000K

INSTANT WATER HEATER



MODEL	⚡ WATTAGE
GE-WH-101	2 KWatt

OTHER SPECIFICATIONS:

- BIS CERTIFIED THERMOSTAT & ELEMENT COIL
- 100% SHOCK PROOF
- GIVES HOT WATER IN 6 SECONDS
- AUTO CUT OFF SYSTEM FOR SAFETY
- EASY TO FIT IT AND USE
- LIGHTWEIGHT AND EXTREMELY HANDY
- 50 TO 60 LITER HOT WATER IN ONLY 1 UNIT OF ELECTRICITY
- USEFUL IN HOME, HOTEL, SALON, BEAUTY PARLOUR, CLINIC, HOSTEL, ETC.

11/13/2019 <https://udyogaadhaar.gov.in/UAPrintAcknowledgement.aspx>

GOVT. OF INDIA
सूक्ष्म, लघु और मध्यम उद्यम संवर्धन
MINISTRY OF MICRO, SMALL & MEDIUM ENTERPRISES

उद्योग आधार **Udyog Aadhaar**

A

Type of Enterprise: Micro Small Medium
Manufacturing X Service X
Udyam No. MICHAAD186880

Udyog Aadhaar Registration Certificate

Udyog Aadhaar Number: MGSAD186880
Name of Enterprise: GALAXY ELECTRONICS
Location of Plant Details:

S/N	Floor/Block No.	Name of Premises/Building/Village	Road/Street Lane	Area/Locality	City	Pin	State	District
1	OFFICE NO-4	MAULIKRUPA BUILDING	SINHGAD ROAD	NANDED CITY GATE AREA	PUNE	411041	MAHARASHTRA	PUNE

Official Address of Enterprise:
SHIRGAD ROAD
District: PUNE State: MAHARASHTRA PIN: 411008
Mobile No: 9850416845 Email: ptegalaxyelectronics@gmail.com

Date of commencement: 02/08/2017
Major Activity: MANUFACTURING
Enterprise Type: Micro

Previous Registration details of any National Industry Classification Code:

S/N	NC 2 Digit	NC 4 Digit	NC 5 Digit Code	Activity Type
1	27	2740	27400	Manufacture of electrical equipment
2	27	2740	27400	Manufacture of electric lighting equipment

Acknowledgement: Date of Filing: 12/11/2019 Date of Printing: 13/11/2019

Disclaimer: This is computer generated statement, no signature required.
Printed from udyogaadhaar.gov.in
MyAamr Mobile App (Beta Version) is available now for download: <https://play.google.com/store/apps/details?id=com.mamr.mamr>

<https://udyogaadhaar.gov.in/UAPrintAcknowledgement.aspx>

Integrity Pledge

We believe that corruption has been one of the major obstacles to economic, political and social progress of our country.

We believe that all stakeholders such as Government, citizens and private sector need to work together to eradicate corruption.

We acknowledge our responsibility to lead by example and the need to put in place safeguards, integrity frameworks and code of ethics to ensure that we are not part of any corrupt practice and we tackle instances of corruption with utmost strictness.

We realize that as an Organization, we need to lead from the front in eradicating corruption and in maintaining highest standards of integrity, transparency and good governance in all aspects of our operations.

We, therefore, pledge that:

- We shall promote ethical business practices and foster a culture of honesty and integrity;
- We shall not offer or accept bribes;
- We shall commit to good corporate governance based on transparency, accountability and fairness;
- We shall adhere to relevant laws, rules and compliance mechanisms in the conduct of business;
- We shall adopt a code of ethics for all our employees;
- We shall sensitize our employees of laws, regulations, etc. relevant to their work for honest discharge of their duties;
- We shall provide grievance redressal and Whistle Blower mechanism for reporting grievances and fraudulent activities;
- We shall protect the rights and interests of stakeholders and the society at large.

MAHARASHTRA, 28th Jun 2019

NITIN CHAUDHARI
owner
Authorized Representative
GALAXY ELECTRONICS

6276394695

CERTIFICATE OF TRUST

Galaxy Electronic's
Pune, Maharashtra

has been certified as a trusted member of
IndiaMART

Following details of the company have been verified*

- ✓ Director / Proprietor: Mr. Rajendra Walhekar
- ✓ GSTIN: 27AARFG5089N1ZF
- ✓ Business Address: Office No. 4, S. No. 137, Maulikrupa Building Opposite Ganesh Mangal Karyalay, Sinhgad Road, Above Ramrajya Bank, Nanded Phata, Pune- 411041, Maharashtra, India
- ✓ Mobile Number
- ✓ Email Id

Issue date: 27th Jan 2022 | Expiry date: 28th Feb 2026

indiamart

IndiaMART InterMESH Ltd.
6th floor, Tower 2, Assotech Business Cresterra, Plot No.22, Sec 135, Noida-201305, Uttar Pradesh, India.
☎ 096-9696-9696 | ✉ customercare@indiamart.com

OUR CLIENTS





**GALAXY
ELECTRONICS**

CONTACT US

Rajendra Walhekar: +91 88309 94756 

Nitin Chaudhari: +91 98504 16845 

info@galaxyelectronics.co 

Sr. No-50/21/3, 1st Floor, Laxmi Chhaya
Building, Near Deshpande Garden, Opposite
Shiv Parvati Mangal Karyalay, Narhe -
Dhayari Road, Pune- 411041 